

FORMULA

Green Industrial Nanosecound Lasers



Feature & Benefits:

- · All-in-one box design for easy integration
- · Lowest Cost of Ownership in the industry
- · Power up to 50W
- Excellent beam quality of M²<1.2
- · Simple and decent sofware interface
- · High reliability for 24/7 applications

Applications:

- · PCB/FPC cutting & micro-maching
- · Thin film/PI film cutting
- · Wafer Scribing
- · Solar cell processing

Specification	FORMULA 532		
	532-20W-50K	532-35W-50K	532-50W-300K
Wavelength(nm)		532	
Average Power (Watts)	>20W@50KHz	>35W@50KHz	>50W@300KHz
Pulse Enengy(μ)	> 400	>700	>500
Specificed Repetition Rate(kHz)	50	50	300
Repetition rate(kHz)	30-150 40~300		
Pulse Width(ns)	< 38	<38	<48
Beam Quality(M²)	<1.2		
Beam Roundness(%)	>90		
Beam Diameter(mm)	~0.85		
Beam Divergence(mRad)	<2		
Point Stability(μrad/°C)	<20		
Polarization Ratio	1:100 Linear, Vertical		
Pulse-to-Pulse Stability(%RMS)	<3		
Average Power Stability(% over 12 hour)	<3		
Cold Start Warm-up(mins.)	<40		
Stand by Warm-up(mins.)	<10		
Operation Temperature Range(°C)	15 to 35		
Operation Humidity Range(%)	20 to 80,non-condensing		
Storage Temperature Range(°C)	- 20 to 50		
Storage Humidity Range(%)	20 to 80,non-condensing		
Input Voltage(VDC)/Rated Power(W)	24/450		
Communication	RS232		
Cooling	Water		
Weight(kg)	20		






Address: Advanced Optowave Corporation USA 105 Comac

St.Ronkonkoma, NY 11779 USA

Email:info@a-optowave.com URL:www.a-optowave.com TEL:001-631-750-6035

FORMULA

UV Industrial Nanosecound Lasers

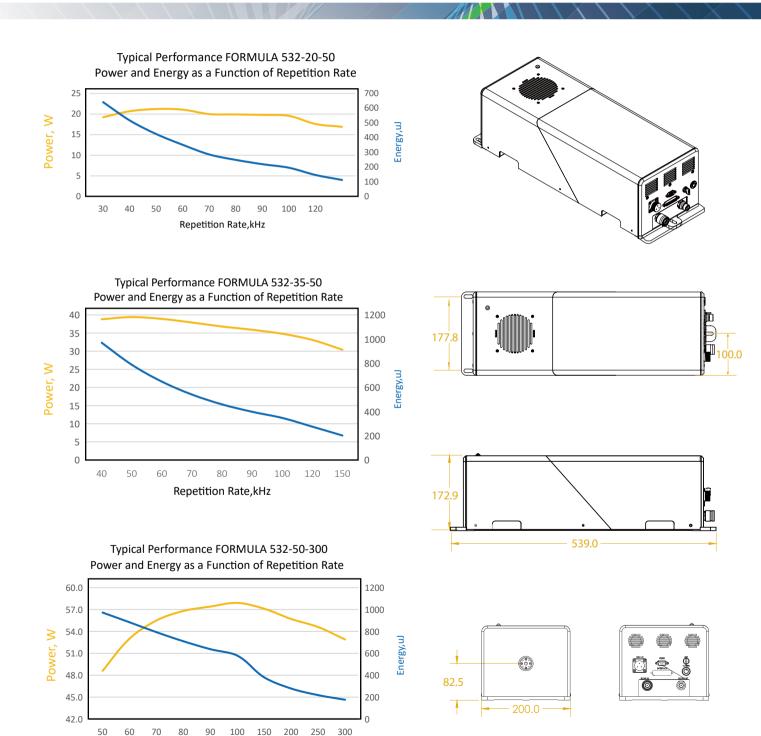



Repetition Rate,kHz